




浙江万马天屹通信线缆有限公司

Zhejiang Wanma Tianyi Communication Wire & Cable Co., Ltd.

500 焊管

产品描述

| | 材料 | 直径 (mm) |
|-----|----------|----------------|
| 内导体 | 铜包铝 | 2.77±0.03 |
| 绝缘 | PE 发泡 | 11.48±0.10 |
| 外导体 | 焊接铝管 | 12.75±0.10 |
| 护套 | 黑色 PE | 14.22±0.20 |
| 包装 | 1000m/木盘 | D950×d420×H520 |

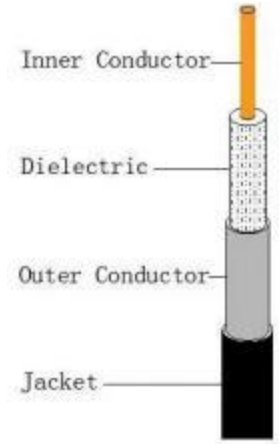

电缆特性

| | |
|------------------|-----------|
| 电容量 | 50±3 pF/m |
| 阻抗 | 75±2 ohms |
| 结构回波损耗 5-1000MHz | ≤-23 dB |

| | |
|------|-------------|
| 速率 | 87% Min |
| 直流电阻 | 5.90 ohm/km |
| 工作温度 | -40°C~+70°C |

衰减 @ 20°C

| MHz | dB/100ft | dB/100m. |
|-----|----------|----------|
| 5 | 0.16 | 0.52 |
| 55 | 0.55 | 1.80 |
| 211 | 1.09 | 3.58 |
| 250 | 1.20 | 3.94 |
| 270 | 1.24 | 4.06 |
| 300 | 1.31 | 4.30 |
| 330 | 1.38 | 4.53 |
| 350 | 1.43 | 4.69 |

| MHz | dB/100ft | dB/100m. |
|------|----------|----------|
| 400 | 1.35 | 5.02 |
| 450 | 1.63 | 5.35 |
| 500 | 1.73 | 5.67 |
| 550 | 1.82 | 5.97 |
| 600 | 1.92 | 6.30 |
| 750 | 2.17 | 7.12 |
| 870 | 2.35 | 7.69 |
| 1002 | 2.54 | 8.32 |

