




## RG213

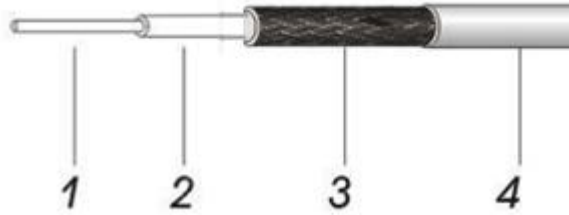

### 结构参数 Cable Construction

结构 No.	材料 Material	尺寸 Dimensions(mm)
1.内导体 Inner Conductor	铜丝 Bare Copper	7*0.752±0.02
2.绝缘 Dielectric	实芯 PE Solid PE	7.24±0.13
3.外导体 Outer Conductor	铜丝 Copper Braiding	95%编织密度 95% Coverage
4.护套 Jacket	PVC	10.29±0.18

### 电气性能 Mechanical Characteristics

特性阻抗 Impedance	50±2Ω	电容 Capacitance	30.81pF/ft
速率 Velocity	66%	护套耐压 Jacket spark	5000 V.RMS
最小弯曲半径 Min Bend Radius	51.5mm		

### 衰减 Attenuation

频率 Frequency (MHz)	典型值 Typical (dB/100ft)	最大值 Max (dB/100ft)	频率 Frequency (MHz)	典型值 Typical (dB/100ft)	最大值 Max (dB/100ft)
130	0.55	0.61	400	4.10	4.51
50	1.30	1.43	700	6.50	7.15
100	1.90	2.09	900	7.60	8.36
200	2.70	2.97	1000	8.00	8.80

