




浙江万马天屹通信线缆有限公司

Zhejiang Wanma Tianyi Communication Wire & Cable Co., Ltd.

RG6 系列同轴电缆—四屏蔽自承

产品描述

	材料	直径 (mm)
内导体	CCS	1.02
绝缘	PE 发泡	4.57
铝箔	Bonded APA	4.78
编织	铝镁合金丝	5.26
铝箔	APA	5.34
编织	铝镁合金丝	5.82
自承	镀锌钢丝	1.30
护套	PVC	7.54
包装	305m/木盘	D350×d100×H300

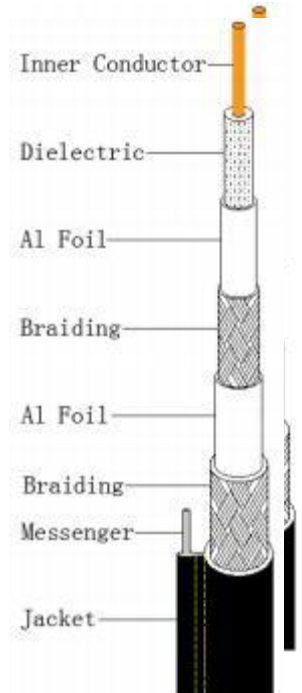

电缆特性

电容量	52 pF/m	结构回波损耗 5~1000MHz	≤ -20 dB
阻抗	75 ± 3 ohms	速率	82%

衰减 @ 20°C

MHz	dB/100ft	dB/100m.	MHz	dB/100ft	dB/100m.
55	1.60	5.25	450	4.40	14.43
211	3.05	10.00	500	4.66	15.29
250	3.30	10.82	550	4.90	16.08
270	3.37	11.04	600	5.10	16.73
300	3.55	11.64	750	5.65	18.54
330	3.74	12.26	870	6.11	20.04
350	3.85	12.63	1000	6.55	21.49
400	4.15	13.61			

