




浙江万马天屹通信线缆有限公司

Zhejiang Wanma Tianyi Communication Wire & Cable Co., Ltd.

RG6 系列同轴电缆—四屏蔽自承+充油

产品描述

	材料	直径 (mm)
内导体	CCS	1.02
绝缘	PE 发泡	4.57
铝箔	Bonded APA	4.78
编织	铝镁合金丝	5.26
铝箔	APA	5.34
编织	铝镁合金丝	5.82
自承	镀锌钢丝	1.30
护套	PE+油膏	7.54
包装	305m/木盘	D350×d100×H300

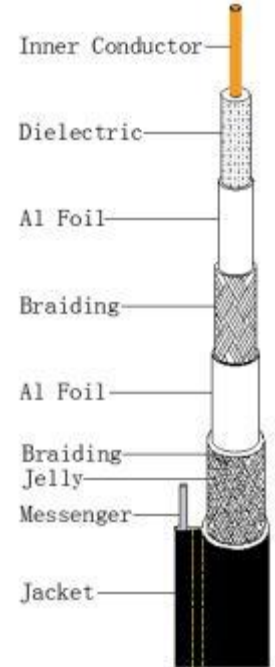

电缆特性

电容量	52 pF/m
阻抗	75 ± 3 ohms

结构回波损耗 5~1000MHz	≤ -20 dB
速率	82%

衰减 @ 20°C

MHz	dB/100ft	dB/100m.
55	1.60	5.25
211	3.05	10.00
250	3.30	10.82
270	3.37	11.04
300	3.55	11.64
330	3.74	12.26
350	3.85	12.63
400	4.15	13.61

MHz	dB/100ft	dB/100m.
450	4.40	14.43
500	4.66	15.29
550	4.90	16.08
600	5.10	16.73
750	5.65	18.54
870	6.11	20.04
1000	6.55	21.49

